



Cable ID: TKE-C10-F42-5E-305-LSZH

Test Limit: TIA Cat 5e Perm. Link

Limits Version: V7.4

Date / Time: 04/29/2026 04:04:05 PM

Headroom 4.7 dB (NEXT 1,2-4,5)

Cable Type: Cat 5e F/UTP

NVP: 69.0%

Main: Versiv

S/N: 1944019

Software Version: V6.4 Build 4

Calibration Date: 12/30/2024

Adapter: DSX-8000 (DSX-PLA804)

S/N: 19420978

Test Summary: PASS

Remote: Versiv

S/N: 1944025

Software Version: V6.4 Build 4

Calibration Date: 12/30/2024

Adapter: DSX-8000R (DSX-PLA804)

S/N: 19420982

Length (ft), Limit 295	[Pair 1,2]	308
Prop. Delay (ns), Limit 498	[Pair 3,6]	474
Delay Skew (ns), Limit 44	[Pair 3,6]	20
Resistance (ohms)	[Pair 3,6]	19.23
Insertion Loss Margin (dB)	[Pair 4,5]	1.9
Frequency (MHz)	[Pair 4,5]	100.0
Limit (dB)	[Pair 4,5]	21.0



308 ft




Wire Map (T568B)

PASS



Insertion Loss (dB)

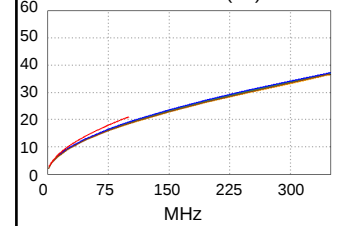

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2-4,5	1,2-4,5	1,2-4,5	1,2-4,5
NEXT (dB)	7.2	4.7	7.2	4.7
Freq. (MHz)	97.3	95.0	97.3	95.0
Limit (dB)	32.5	32.7	32.5	32.7
Worst Pair	4,5	4,5	4,5	4,5
PS NEXT (dB)	9.2	7.4	9.2	7.5
Freq. (MHz)	97.3	95.3	97.3	95.5
Limit (dB)	29.5	29.7	29.5	29.6

PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	4,5-3,6	3,6-4,5	4,5-3,6
ACR-F (dB)	18.9	19.3	18.9	19.3
Freq. (MHz)	100.0	100.0	100.0	100.0
Limit (dB)	18.6	18.6	18.6	18.6
Worst Pair	3,6	3,6	4,5	3,6
PS ACR-F (dB)	20.2	19.6	20.8	19.8
Freq. (MHz)	1.1	63.0	100.0	100.0
Limit (dB)	54.6	19.6	15.6	15.6

N/A	MAIN	SR	MAIN	SR
Worst Pair	1,2-4,5	1,2-4,5	1,2-4,5	1,2-4,5
ACR-N (dB)	9.1	6.5	9.1	6.5
Freq. (MHz)	97.3	95.0	97.3	95.0
Limit (dB)	11.8	12.3	11.8	12.3
Worst Pair	4,5	4,5	4,5	4,5
PS ACR-N (dB)	11.1	9.3	11.1	9.3
Freq. (MHz)	97.3	95.5	97.3	95.5
Limit (dB)	8.8	9.2	8.8	9.2

PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2	1,2	1,2	1,2
RL (dB)	4.7	4.6	4.7	4.6
Freq. (MHz)	2.6	2.6	2.6	2.6
Limit (dB)	19.0	19.0	19.0	19.0

Compliant Network Standards:

10BASE-T 100BASE-TX
1000BASE-T 2.5GBASE-T
ATM-51 ATM-155
TR-4 TR-16 Active

100BASE-T4
ATM-25
100VG-AnyLan
TR-16 Passive

